



AT-MWS0091 (WA-24Q12R) AC/DC Adapter Kit

Quick Install Guide

Introduction

This guide provides assembly instructions for the AT-MWS0091 Multi-region Power AC Adapter. The AC adapter is shipped with the AC plug for US attached. When the AC socket on your wall is other than the USA type, you can replace the AC plug attached with one of the optional AC plugs.

Verify Package Contents

1. Unpack the shipment and ensure that the AT-MWS0091 package contents match the components shown in Figure 1.

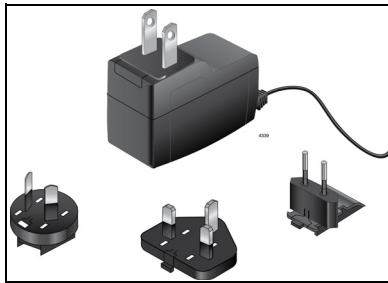


Figure 1. Package Contents

Detach AC Plug From AC Adapter

1. Press the release tab on the AC plug with your thumb and slide the AC plug as shown in Figure 2.

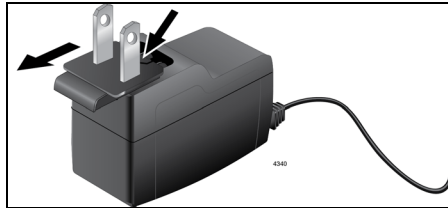


Figure 2. Press Release Tab On AC Plug

2. Remove the AC plug from the AC adapter as shown in Figure 3.

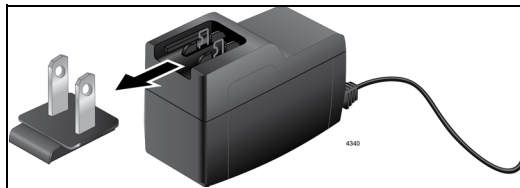


Figure 3. Detach AC Plug

Attach AC Plug To AC adapter

1. Select the compatible AC plug for your country and attach it to the AC adapter as shown in Figure 4.



Warning: To prevent electric shock, slide the AC power plug into the AC/DC power adapter before plugging into the AC power wall receptacle. **E116**

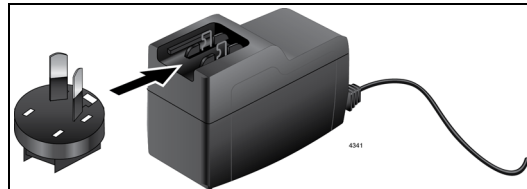


Figure 4. Attach AC Plug

Standards and Specifications

Compliance

This product meets the following Compliance standards:

- RoHS
- European Union RoHS

Safety

This product meets the following Safety standards:

- UL60950-1, 2nd Edition
- CAN/CSA-C22.2 No. 60950-1-07, 2nd Edition
- EN 60950-1

Electrical Specifications

This product meets the following electrical specifications:

- Input Voltage Range: 100 - 240 VAC
- Input Frequency: 50 - 60 Hz
- Input Power Saving (No load): Less than 0.075W
- Output Voltage: +12 VDC
- Output Load Range: 0 - 2.0A
- Maximum Operating Temperature: 45°C (113°F)
- Maximum Operating Altitude: 5,000 m (16,404 ft)

Copyright © 2018 Allied Telesis, Inc. All rights reserved. No part of this publication may be reproduced without prior written permission from Allied Telesis, Inc. www.alliedtelesis.com