


# CentreCOM<sup>®</sup> SE250 Series

## 10 Gigabit Edge Switches

Allied Telesis CenterCOM SE250 Series 10 Gigabit Layer 2 switches provide high-speed, high-density edge connectivity. All ports support up to 10G speed for seamless communication to servers and other 10G terminals, and resilient aggregated connectivity to distribution and core switches.

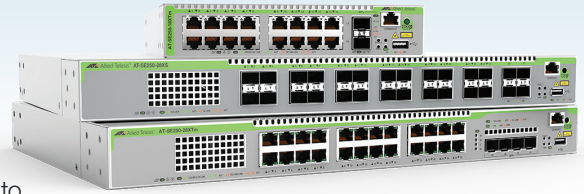

### Overview

Allied Telesis CenterCOM SE250 Series switches provide high-speed network access with up to 10G connectivity for a cost-effective network solution. Easily support next generation end devices and applications with high-bandwidth demands.

The SE250 Series fiber models support 1/10G (SFP and SFP+) on all ports, making them ideal for long-distance connections, and for high-capacity devices such as servers. The copper models support Multi-Gigabit (1/2.5/5/10G) for flexible deployment options and the ability to support all end devices.

### Specifications

#### Performance

- ▶ Up to 32K MAC addresses
- ▶ 2GB DDR4 SDRAM
- ▶ 4094 configurable VLANs
- ▶ 256MB flash memory
- ▶ Packet Buffer memory: 3MB
- ▶ Supports 9KB L2 jumbo frames
- ▶ Wirespeed forwarding

#### Diagnostic tools

- ▶ Active Fiber Monitoring detects tampering on optical links
- ▶ Cable fault locator (TDR)
- ▶ Find-me device locator
- ▶ Link Monitoring
- ▶ Automatic link flap detection and port shutdown
- ▶ Optical Digital Diagnostic Monitoring (DDM)
- ▶ Ping polling for IPv4 and IPv6
- ▶ Port and VLAN mirroring (RSPAN)
- ▶ TraceRoute for IPv4 and IPv6
- ▶ Uni-Directional Link Detection (UDLD)

#### IPv4 Features

- ▶ Black hole routing
- ▶ DHCPv4 client and relay

#### IPv6 Features

- ▶ IPv4 and IPv6 dual stack
- ▶ Device management over IPv6 networks with SNMPv6, Telnetv6 and SSHv6
- ▶ Log to IPv6 hosts with Syslog v6
- ▶ MLD v1/v2 snooping

#### Management

- ▶ Allied Telesis Autonomous Management Framework<sup>™</sup> Plus (AMF Plus) enables powerful centralized management, zero-touch device installation and recovery, and the intent-based management features in Vista Manager EX (from v3.10.1)
- ▶ Manage the SE250 Series with Vista Manager EX—our graphical single-pane-of-glass monitoring and management tool for AMF Plus networks, which also supports wireless and third party device
- ▶ AMF Security (AMF-Sec) enables a self-defending network - managing the SE250 (or other AMF Plus switches) to automatically block the spread of malware by quarantining suspect end devices
- ▶ Console management port on the front panel for ease of access
- ▶ NETCONF/RESTCONF northbound interface with YANG data modelling
- ▶ Eco-friendly mode allows ports and LEDs to be disabled to save power
- ▶ Industry-standard CLI with context-sensitive help
- ▶ Management stacking allows up to 32 devices to be managed from a single console
- ▶ Powerful CLI scripting engine
- ▶ Comprehensive SNMP MIB support for standards-based device management
- ▶ Built-in text editor
- ▶ Event-based triggers allow user-defined scripts to be executed upon selected system events
- ▶ sFlow enables traffic monitoring in switched networks
- ▶ USB interface allows software release files, configurations and other files to be stored for backup and distribution to other devices
- ▶ Web-based Graphical User Interface (GUI)

#### Quality of Service (QoS)

- ▶ 8 priority queues with a hierarchy of high priority queues for real time traffic, and mixed scheduling, for each switch port
- ▶ Limit bandwidth per port or per traffic class down to 64kpbs

- ▶ Wirespeed traffic classification with low latency essential for VoIP and real-time streaming media applications
- ▶ Policy-based QoS based on VLAN, port, MAC and general packet classifiers
- ▶ Policy-based storm protection
- ▶ Extensive remarking capabilities
- ▶ Taildrop for queue congestion control
- ▶ Queue scheduling options for strict priority, weighted round robin or mixed scheduling
- ▶ IP precedence and DiffServ marking based on layer 2, 3 and 4 headers

#### Resiliency Features

- ▶ Control Plane Prioritization (CPP) ensures the CPU always has sufficient bandwidth to process network control traffic
- ▶ Dynamic link failover (host attach)
- ▶ EPSR (Ethernet Protection Switched Rings) with SuperLoop Protection (SLP)

## Key Features

- ▶ AlliedWare Plus fully featured OS
- ▶ AMF Plus edge node<sup>1</sup>
- ▶ Vista Manager compatible
- ▶ AMF-Security compatible
- ▶ 1/2.5/5/10G (Multi-Gigabit) connectivity on copper ports
- ▶ 1/10G (SFP and SFP+) connectivity on fiber ports
- ▶ EPSR high-speed resilient rings
- ▶ Active Fiber Monitoring
- ▶ Link Monitoring
- ▶ VLAN ACLs
- ▶ VLAN mirroring (RSPAN)
- ▶ NETCONF/RESTCONF with YANG data modelling

<sup>1</sup> AMF Plus edge is for products used at the edge of the network, and only support a single AMF Plus link. They cannot use cross links or virtual links.

## CentreCOM SE250 Series | 10 Gigabit Edge Switches

- ▶ Link aggregation (LACP) on LAN ports
- ▶ Loop protection: loop detection and thrash limiting
- ▶ PVST+ compatibility mode
- ▶ RRP snooping
- ▶ Spanning Tree Protocols (STP, RSTP, MSTP)
- ▶ STP root guard

### Security Features

- ▶ Access Control Lists (ACLs) based on layer 3 and 4 headers
- ▶ Configurable ACLs for management traffic
- ▶ Auth fail and guest VLANs
- ▶ Authentication, Authorisation and Accounting (AAA) for RADIUS and TACACS+
- ▶ Bootloader can be password protected for device security
- ▶ BPDU protection
- ▶ DHCP snooping, IP source guard and Dynamic ARP Inspection (DAI)
- ▶ Dynamic VLAN assignment
- ▶ Network Access and Control (NAC) features manage endpoint security

- ▶ Port-based learn limits (intrusion detection)
- ▶ Secure Copy (SCP)
- ▶ Secure File Transfer Protocol (SFTP) client
- ▶ Strong password security and encryption
- ▶ Tri-authentication: MAC-based, web-based and IEEE 802.1x

### VLAN Support

- ▶ Private VLANs provide security and port isolation for multiple customers using the same VLAN
- ▶ Voice VLAN

### Environmental Specifications

- ▶ Operating temperature range: 0°C to 50°C (32°F to 122°F)  
Derated by 1°C per 305 meters (1,000 ft)
- ▶ Storage temperature range: -25°C to 70°C (-13°F to 158°F)
- ▶ Operating relative humidity range: 5% to 90% non-condensing
- ▶ Storage relative humidity range: 5% to 95% non-condensing

- ▶ Operating altitude: 3,000 meters maximum (9,843 ft)

### Electrical approvals and compliances

- ▶ EMC: ETSI EN300-386, EN300-132-2, FCC class A, VCCI class A
- ▶ Immunity: EN55024, EN61000-3-levels 2 (Harmonics), and 3 (Flicker) – AC models only

### Safety

- ▶ Standards: UL62368-1, CAN/CSA-C22.2 No. 60950-1-03, EN60950-1, EN60825-1, AS/NZS 60950.1
- ▶ Certifications: UL, cUL, UL-EU

### Restrictions on Hazardous Substances (RoHS) Compliance

- ▶ EU RoHS compliant
- ▶ China RoHS compliant

## Product Specifications

PRODUCT	100/1000T/2.5/5/10G (RJ-45) COPPER PORTS	1/10G SFP+ PORTS	TOTAL PORTS	SWITCHING FABRIC	FORWARDING RATE
SE250-18XTm*	16	2	18	360Gbps	267.9Mpps
SE250-28XTm	24	4	28	560Gbps	416.7Mpps
SE250-18XS	-	18	18	360Gbps	267.9Mpps
SE250-28XS	-	28	28	560Gbps	416.7Mpps

### Physical specifications

PRODUCT	WIDTH X DEPTH X HEIGHT	WEIGHT
SE250-18XTm*	210 × 346 × 42.5 mm (8.27 x 13.62 x 1.67 in)	TBD
SE250-28XTm	440 × 290 × 44 mm (17.32 x 11.42 x 1.73 in)	4.0 kg (8.8 lb)
SE250-18XS	210 × 346 × 42.5 mm (8.27 x 13.62 x 1.67 in)	2.7 kg (5.9 lb)
SE250-28XS	440 × 290 × 44 mm (17.32 x 11.42 x 1.73 in)	3.8 kg (8.3 lb)

### Power and Noise characteristics

PRODUCT	MAX POWER CONSUMPTION (W)	MAX HEAT DISSIPATION (BTU/H)	NOISE (DB)
SE250-18XTm*	TBD	TBD	TBD
SE250-28XTm	160	540	46 - 63
SE250-18XS	70	236	39 - 48
SE250-28XS	86	293	39 - 52

### Latency (microseconds)

PRODUCT	PORT SPEED (µs)			
	1GBPS	2.5GBPS	5GBPS	10GBPS
SE250-18XTm*	4.86	7.23	4.63	3.49
SE250-28XTm	4.48	8.43	5.72	2.73
SE250-18XS	3.65	-	-	1.84
SE250-28XS	3.59	-	-	1.60

\* Coming soon

## Standards and Protocols

### Authentication

RFC 1321 MD5 Message-Digest algorithm  
 RFC 1828 IP authentication using keyed MD5

### Cryptographic Algorithms

#### FIPS Approved Algorithms

Encryption (Block Ciphers):

- ▶ AES (ECB, CBC, CFB and OFB Modes)
- ▶ 3DES (ECB, CBC, CFB and OFB Modes)

Block Cipher Modes:

- ▶ CCM
- ▶ CMAC
- ▶ GCM
- ▶ XTS

Digital Signatures & Asymmetric Key Generation:

- ▶ DSA
- ▶ ECDSA
- ▶ RSA

Secure Hashing:

- ▶ SHA-1
- ▶ SHA-2 (SHA-224, SHA-256, SHA-384, SHA-512)

Message Authentication:

- ▶ HMAC (SHA-1, SHA-2(224, 256, 384, 512))

Random Number Generation:

- ▶ DRBG (Hash, HMAC and Counter)

### Non FIPS Approved Algorithms

RNG (AES128/192/256)  
 DES  
 MD5

### Ethernet

IEEE 802.2 Logical Link Control (LLC)  
 IEEE 802.3 Ethernet  
 IEEE 802.3ab1000BASE-T  
 IEEE 802.3ae10 Gigabit Ethernet  
 IEEE 802.3an10GBASE-T  
 IEEE 802.3azEnergy Efficient Ethernet (EEE)  
 IEEE 802.3bz2.5GBASE-T and 5GBASE-T ("multi-gigabit")  
 IEEE 802.3x Flow control - full-duplex operation  
 IEEE 802.3z 1000BASE-X

### IPv4 Features

RFC 768 User Datagram Protocol (UDP)  
 RFC 791 Internet Protocol (IP)  
 RFC 792 Internet Control Message Protocol (ICMP)  
 RFC 793 Transmission Control Protocol (TCP)  
 RFC 826 Address Resolution Protocol (ARP)  
 RFC 894 Standard for the transmission of IP datagrams over Ethernet networks  
 RFC 919 Broadcasting Internet datagrams  
 RFC 922 Broadcasting Internet datagrams in the presence of subnets  
 RFC 932 Subnetwork addressing scheme  
 RFC 950 Internet standard subnetting procedure  
 RFC 1035 DNS client  
 RFC 1042 Standard for the transmission of IP datagrams over IEEE 802 networks  
 RFC 1071 Computing the Internet checksum  
 RFC 1122 Internet host requirements  
 RFC 1191 Path MTU discovery  
 RFC 1518 An architecture for IP address allocation with CIDR  
 RFC 1519 Classless Inter-Domain Routing (CIDR)  
 RFC 1591 Domain Name System (DNS)  
 RFC 1812 Requirements for IPv4 routers  
 RFC 1918 IP addressing  
 RFC 2581 TCP congestion control  
 RFC 3021 Using 31-Bit Prefixes on IPv4 Point-to-Point Links

### IPv6 Features

RFC 1981 Path MTU discovery for IPv6  
 RFC 2460 IPv6 specification  
 RFC 2464 Transmission of IPv6 packets over Ethernet networks  
 RFC 3484 Default address selection for IPv6

RFC 3587 IPv6 global unicast address format  
 RFC 3596 DNS extensions to support IPv6  
 RFC 4007 IPv6 scoped address architecture  
 RFC 4193 Unique local IPv6 unicast addresses  
 RFC 4213 Transition mechanisms for IPv6 hosts and routers  
 RFC 4291 IPv6 addressing architecture  
 RFC 4443 Internet Control Message Protocol (ICMPv6)  
 RFC 4861 Neighbor discovery for IPv6  
 RFC 4862 IPv6 Stateless Address Auto-Configuration (SLAAC)  
 RFC 5014 IPv6 socket API for source address selection  
 RFC 5095 Deprecation of type 0 routing headers in IPv6

### Management

AMF MIB and SNMP traps  
 AT Enterprise MIB  
 Optical DDM MIB  
 SNMP support SNMPv1, v2c and v3  
 ANSI/TIA-1057 LLDP-Media Endpoint Detection  
 IEEE 802.1AB Link Layer Discovery Protocol (LLDP)  
 RFC 1155 Structure and identification of management information for TCP/IP-based Internets  
 RFC 1157 Simple Network Management Protocol (SNMP)  
 RFC 1212 Concise MIB definitions  
 RFC 1213 MIB for network management of TCP/IP-based Internets: MIB-II  
 RFC 1215 Convention for defining traps for use with the SNMP  
 RFC 1227 SNMP MUX protocol and MIB  
 RFC 1239 Standard MIB  
 RFC 2578 Structure of Management Information v2 (SMIv2)  
 RFC 2579 Textual conventions for SMIv2  
 RFC 2580 Conformance statements for SMIv2  
 RFC 2674 Definitions of managed objects for bridges with traffic classes, multicast filtering and VLAN extensions  
 RFC 2741 Agent extensibility (AgentX) protocol  
 RFC 2819 RMON MIB (groups 1,2,3 and 9)  
 RFC 2863 Interfaces group MIB  
 RFC 3176 sFlow: a method for monitoring traffic in switched and routed networks  
 RFC 3411 An architecture for describing SNMP management frameworks  
 RFC 3412 Message processing and dispatching for the SNMP  
 RFC 3413 SNMP applications  
 RFC 3414 User-based Security Model (USM) for SNMPv3  
 RFC 3415 View-based Access Control Model (VACM) for SNMP  
 RFC 3416 Version 2 of the protocol operations for the SNMP  
 RFC 3417 Transport mappings for the SNMP  
 RFC 3418 MIB for SNMP  
 RFC 3635 Definitions of managed objects for the Ethernet-like interface types  
 RFC 3636 IEEE 802.3 MAU MIB  
 RFC 4022 MIB for the Transmission Control Protocol (TCP)  
 RFC 4113 MIB for the User Datagram Protocol (UDP)  
 RFC 4188 Definitions of managed objects for bridges  
 RFC 4292 IP forwarding table MIB  
 RFC 4293 MIB for the Internet Protocol (IP)  
 RFC 4318 Definitions of managed objects for bridges with RSTP  
 RFC 4560 Definitions of managed objects for remote ping, traceroute and lookup operations  
 RFC 5424 The Syslog protocol

### Multicast support

IGMP snooping (IGMPv1, v2 and v3)  
 IGMP snooping fast-leave  
 MLD snooping (MLDv1 and v2)  
 RFC 4541 IGMP and MLD snooping switches

### Quality of Service (QoS)

IEEE 802.1p Priority tagging  
 RFC 2211 Specification of the controlled-load network element service  
 RFC 2474 DiffServ precedence for eight queues/port

RFC 2475 DiffServ architecture  
 RFC 2597 DiffServ Assured Forwarding (AF)  
 RFC 2697 A single-rate three-color marker  
 RFC 2698 A two-rate three-color marker  
 RFC 3246 DiffServ Expedited Forwarding (EF)

### Resiliency Features

IEEE 802.1AXLink aggregation (static and LACP)  
 IEEE 802.1D MAC bridges  
 IEEE 802.1s Multiple Spanning Tree Protocol (MSTP)  
 IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)  
 IEEE 802.3adStatic and dynamic link aggregation

### Security Features

SSH remote login  
 SSLv2 and SSLv3  
 IEEE 802.1X authentication protocols (TLS, TTLS, PEAP and MD5)  
 IEEE 802.1X multi-suplicant authentication  
 IEEE 802.1X port-based network access control  
 RFC 2560 X.509 Online Certificate Status Protocol (OCSP)  
 RFC 2818 HTTP over TLS ("HTTPS")  
 RFC 2865 RADIUS authentication  
 RFC 2866 RADIUS accounting  
 RFC 2868 RADIUS attributes for tunnel protocol support  
 RFC 2986 PKCS #10: certification request syntax specification v1.7  
 RFC 3546 Transport Layer Security (TLS) extensions  
 RFC 3579 RADIUS support for Extensible Authentication Protocol (EAP)  
 RFC 3580 IEEE 802.1X RADIUS usage guidelines  
 RFC 3748 PPP Extensible Authentication Protocol (EAP)  
 RFC 4251 Secure Shell (SSHv2) protocol architecture  
 RFC 4252 Secure Shell (SSHv2) authentication protocol  
 RFC 4253 Secure Shell (SSHv2) transport layer protocol  
 RFC 4254 Secure Shell (SSHv2) connection protocol  
 RFC 5176 RADIUS Change of Authorization (CoA)  
 RFC 5246 Transport Layer Security (TLS) v1.2  
 RFC 5280 X.509 certificate and Certificate Revocation List (CRL) profile  
 RFC 5425 Transport Layer Security (TLS) transport mapping for Syslog  
 RFC 5656 Elliptic curve algorithm integration for SSH  
 RFC 6125 Domain-based application service identity within PKI using X.509 certificates with TLS  
 RFC 6614 Transport Layer Security (TLS) encryption for RADIUS  
 RFC 6668 SHA-2 data integrity verification for SSH

### Services

RFC 854 Telnet protocol specification  
 RFC 855 Telnet option specifications  
 RFC 857 Telnet echo option  
 RFC 858 Telnet suppress go ahead option  
 RFC 1091 Telnet terminal-type option  
 RFC 1350 Trivial File Transfer Protocol (TFTP)  
 RFC 1985 SMTP service extension  
 RFC 2049 MIME  
 RFC 2131 DHCPv4 client  
 RFC 2616 Hypertext Transfer Protocol - HTTP/1.1  
 RFC 2821 Simple Mail Transfer Protocol (SMTP)  
 RFC 2822 Internet message format  
 RFC 3046 DHCP relay agent information option (DHCP option 82)  
 RFC 3396 Encoding long options in DHCPv4  
 RFC 3993 Subscriber-ID suboption for DHCP relay agent option  
 RFC 4330 Simple Network Time Protocol (SNTP) version 4  
 RFC 4954 SMTP service extension for authentication  
 RFC 5905 Network Time Protocol (NTP) version 4

### VLAN support

IEEE 802.1Q Virtual LAN (VLAN) bridges  
 IEEE 802.1v VLAN classification by protocol and port  
 IEEE 802.3acVLAN tagging

## Ordering Information

### AT-SE250-18XTm\*

16-port 100M/1/2.5/5/10G copper switch with 2 x SFP/SFP+ ports, and a single fixed PSU

### AT-SE250-28XTm

24-port 100M/1/2.5/5/10G copper switch with 4 x SFP/SFP+ ports, and a single fixed PSU

### AT-SE250-18XS

18-port SFP/SFP+ fiber switch, with a single fixed PSU

### AT-SE250-28XS

28-port SFP/SFP+ fiber switch, with a single fixed PSU

### AT-BRKT-J24

Wall mount bracket

### AT-RKMT-J14

Rack mount kit for SE250-18XTm and SE250-18XS

### AT-RKMT-J15

Rack mount kit for SE250-18XTm and SE250-18XS

### AT-STND-J03

Rack mount kit to install two devices side by side in a 19-inch equipment rack - SE250-18XTm and SE250-18XS

\* Coming soon

## 10G SFP+ Modules

### AT-SP10SR

10GSR 850 nm short-haul, 300 m with MMF

### AT-SP10SR/I

10GSR 850 nm short-haul, 300 m with MMF industrial temperature

### AT-SP10LR20/I

10GER 1310 nm long-haul, 20 km with SMF industrial temperature

### AT-SP10ER40/I

10GER 1310 nm long-haul, 40 km with SMF industrial temperature

### AT-SP10ZR80/I

10GER 1550 nm long-haul, 80 km with SMF industrial temperature

### AT-SP10TM

1G/2.5G/5G/10G, 100m copper, TAA<sup>2</sup>  
(note that 2.5G/5G speeds are not supported)

### AT-SP10BD10/I-12

10 GbE Bi-Di (1270 nm Tx, 1330 nm Rx) fiber up to 10 km industrial temperature, TAA<sup>2</sup>

### AT-SP10BD10/I-13

10 GbE Bi-Di (1330 nm Tx, 1270 nm Rx) fiber up to 10 km industrial temperature, TAA<sup>2</sup>

### AT-SP10BD20-12

10 GbE Bi-Di (1270 nm Tx, 1330 nm Rx) fiber up to 20 km, TAA<sup>2</sup>

### AT-SP10BD20-13

10 GbE Bi-Di (1330 nm Tx, 1270 nm Rx) fiber up to 20 km, TAA<sup>2</sup>

### AT-SP10BD40/I-12

10 GbE Bi-Di (1270 nm Tx, 1330 nm Rx) fiber up to 40 km industrial temperature, TAA<sup>2</sup>

### AT-SP10BD40/I-13

10 GbE Bi-Di (1330 nm Tx, 1270 nm Rx) fiber up to 40 km industrial temperature, TAA<sup>2</sup>

### AT-SP10BD80/I-14

10 GbE Bi-Di (1490 nm Tx, 1550 nm Rx) fiber up to 80 km industrial temperature, TAA<sup>2</sup>

### AT-SP10BD80/I-15

10 GbE Bi-Di (1550nm Tx, 1490 nm Rx) fiber up to 80 km industrial temperature, TAA<sup>2</sup>

### AT-SP10TW1

1 meter SFP+ direct attach cable

### AT-SP10TW3

3 meter SFP+ direct attach cable

## 1000Mbps SFP Modules

### AT-SPSX

1000SX GbE multi-mode 850 nm fiber up to 550 m

### AT-SPLX10a

1000LX GbE single-mode 1310 nm fiber up to 10 km

### AT-SPLX10/I

1000LX GbE single-mode 1310 nm fiber up to 10 km, industrial temperature

### AT-SPBD10-13

1000LX (LC) GbE Bi-Di (1310 nm Tx, 1490 nm Rx) fiber up to 10 km

### AT-SPBD10-14

1000LX (LC) GbE Bi-Di (1490 nm Tx, 1310 nm Rx) fiber up to 10 km

### AT-SPBD20-13/I

1000BX GbE Bi-Di (1310 nm Tx, 1490 nm Rx) fiber up to 20 km

### AT-SPBD20-14/I

1000BX GbE Bi-Di (1490 nm Tx, 1310 nm Rx) fiber up to 20 km

### AT-SPBD40-13/I

1000LX (LC) GbE single-mode Bi-Di (1310 nm Tx, 1490 nm Rx) fiber up to 40 km, industrial temperature

### AT-SPBD40-14/I

1000LX (LC) GbE single-mode Bi-Di (1490 nm Tx, 1310 nm Rx) fiber up to 40 km, industrial temperature

### AT-SPLX40

1000LX GbE single-mode 1310 nm fiber up to 40 km

### AT-SPZX80

1000ZX GbE single-mode 1550 nm fiber up to 80 km

### AT-SPTXc<sup>3</sup>

10/100/1000 TX (RJ45), up to 100 m

<sup>2</sup> Trade Agreement Act compliant

<sup>3</sup> Supported in a future software release