


x530L Series

Stackable Intelligent Layer 3 Switches

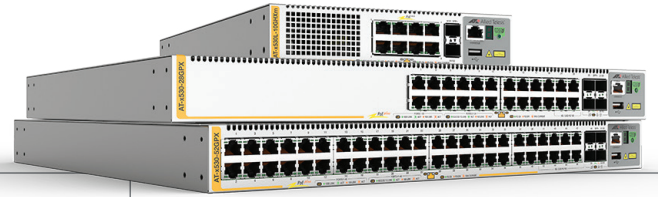

Allied Telesis x530L Series are a high-performing and feature-rich choice for today's networks. The GHXm models feature 8 or 16 x 100M/1/2.5/5G Multi-Gigabit ports with 2 x 10 Gigabit uplinks, while 28 and 52 port models feature 24 or 48 x 10M/100M/1 Gigabit ports with 4 x 10 Gigabit uplinks. The ability to stack multiple units, enables a versatile solution for enterprise applications.

The GHXm models support PoE++ (up to 90W per port), while 28 or 52 port GPX models support PoE+ (up to 30W per port), making them perfect for connecting and powering devices at the network edge such as wireless access points, and IP surveillance cameras.

Network Management

Vista Manager™ EX bundled with Allied Telesis Autonomous Management Framework™ Plus (AMF Plus) meets the increasing management requirements of modern networks. While AMF Plus allows an entire network to be securely and easily managed as a single virtual device, Vista Manager EX provides an intuitive and powerful graphical tool for monitoring and managing AMF Plus wired, Autonomous Wave Control (AWC) wireless, and third party (SNMP) devices.

Cybersecurity

The x530L Series acting as an AMF Plus member is compatible with our AMF-Security solution, which enables a self-defending network. The AMF-Sec controller responds immediately to any internal malware threats by instructing the x530L to isolate the affected part of the network, and quarantine the suspect device. Vista Manager EX alerts network administrators of threats that have been dealt with.

Resilient

Today's converging online services mean there is increasing demand for highly-available networks with minimal downtime. Allied Telesis Virtual Chassis Stacking (VCStack™), in conjunction with link aggregation, provides a network with no single point of failure and application resiliency.

x530L Series switches can form a VCStack of up to eight¹ units for enhanced resiliency and simplified management. Mixed stacking allows the x530L Series to stack with x530 Series Switches. Stacking over Long Distance (VCStack™ LD), which enables stacks to be created over long distance fiber links, makes the x530L Series the perfect choice for distributed environments too.

Ethernet Protection Switched Ring (EPSRing™), and the standards-based G.8032 Ethernet Ring Protection, ensure that distributed network segments have high-speed, resilient access to online resources and applications.

Reliable

The x530L Series was designed with reliability in mind, and guarantees continual delivery of essential services. The 28 and 52 port models feature dual built-in power supplies, and all models have near-hitless online stack reconfiguration, so maintenance does not affect network uptime.

Secure

The x530L Series offers powerful control over network traffic types, secure management options, loop guard to protect against cabling mistakes, and tri-authentication for comprehensive access control.

High-speed wireless

The GHXm models provide support for both 2.5 and 5 Gigabit connectivity, allowing high-speed wireless to run at full capacity while avoiding the need to upgrade existing Cat5e/Cat6 cables.

Key Features

- Autonomous Management Framework Plus (AMF Plus)
- Vista Manager EX compatible
- AMF-Security compatible
- VCStack™ up to 8¹ units locally, or over long distance
- EPSR™ and G.8032 Ethernet Ring Protection for resilient rings
- EPSR Master
- Up to 740W PoE+ power (28 and 52 port models)
- Up to 90W PoE++ per port (GHXm models)
- Continuous PoE
- Multi-Gigabit (100M/1G/2.5G/5G) ports (GHXm models)
- Active Fiber Monitoring (AFM)
- OpenFlow for SDN
- Enhanced Transmission Selection (ETS)
- Multicast Source Discovery Protocol (MSDP)
- Link Monitoring
- Ethernet Alliance PoE Class 8 certified (GHXm models)
- Precision Time Protocol (PTP) Transparent Mode
- NETCONF/RESTCONF with YANG data modelling
- IPFIX (IP Flow Information Export)

Future proof

Ensure a future-proof network, with superior flexibility and the ability to stack multiple units. All x530L models feature 10 Gigabit uplink ports and a comprehensive IPv6 feature set, so are ready for future network traffic demands.

¹ Up to 4 units supported if using 1Gbps ports for stacking

KEY FEATURES

Autonomous Management Framework Plus (AMF Plus)

AMF Plus is a sophisticated suite of management tools that provide a simplified approach to network management. Powerful features like centralized management, auto-backup, auto-upgrade, auto-provisioning and auto-recovery enable plug-and-play networking and zero-touch management.

Any x530L Series switch can operate as the AMF Plus network master, storing firmware and configuration backups for other network nodes. The AMF Plus master enables auto-provisioning and auto-upgrade by providing appropriate files to new network members. New network devices can be pre-provisioned, making installation easy because no onsite configuration is required.

An AMF Plus license (from AW+ version 5.5.2-2 onwards) provides all standard AMF network management and automation features, and also enables the AMF Plus intent-based networking features in Vista Manager EX (from version 3.10.1 onwards).

Virtual Chassis Stacking (VStack™)

The x530L Series supports VStack up to 8 units (or 4 units if using 1Gbps ports for stacking). Stacking links are connected in a ring so each device has dual connections to further improve resiliency. VStack provides high availability with network resources spread out across stacked units, reducing the impact if a unit fails. Aggregating switch ports on different units across the stack provides excellent network resiliency.

Mixed stacking allows the x530L Series to stack with x530 Series switches, providing flexible deployment options.

Long-Distance Stacking (VStack™ LD)

VStack LD allows a VStack to be created over longer distances, perfect for distributed network environments.

Ethernet Protection Switched Ring (EPSRing™)

EPSRing and 10 Gigabit Ethernet allow several x530L Series switches to form high-speed protected rings capable of recovery within as little as 50ms. This feature is perfect for high performance and high availability in enterprise networks.

Super-Loop Protection (SLP) enables a link between two EPSR nodes to be in separate EPSR domains, improving redundancy and network fault resiliency.

The x530L Series switches can act as the EPSR Master, or be deployed as EPSR transit nodes, in a high-speed ring.

G.8032 Ethernet Ring Protection

G.8032 provides standards-based high-speed ring protection, that can be deployed as stand-alone, or interoperate with Allied Telesis EPSR.

Ethernet Connectivity Fault Monitoring (CFM) proactively monitors links and VLANs, and provides alerts when a fault is detected.

Precision Time Protocol (PTP)

PTP (IEEE 1588v2) synchronizes clocks throughout the network with micro-second accuracy, supporting industrial automation and control systems. PTP operates on standalone or stacked switches.

Power over Ethernet (PoE+/ PoE++)

With PoE, a separate power connection to media endpoints such as IP phones and wireless access points is not necessary. PoE reduces costs and provides flexibility, with the x530L 28 and 52 port models supplying up to 30W per port (PoE+).

The GHXm models support up to 90W per port (PoE++) to connect high power devices such as high resolution PTZ cameras, enhanced infrared lighting and lighting controllers, remote Point of Sale (POS) kiosks, and more.

Continuous PoE

Continuous PoE allows the switch to be restarted without affecting the supply of power to connected devices. Smart lighting, security cameras, and other PoE devices will continue to operate during a software upgrade on the switch.

Active Fiber Monitoring (AFM)

AFM prevents eavesdropping on fiber communications by monitoring received optical power. If an intrusion is detected, the link can be automatically shut down, or an operator alert can be sent.

Multi-Gigabit Ethernet

The IEEE 802.3bz standard (also known as "NBASE-T") allows traffic speeds of greater than 1 Gigabit on legacy Cat5e/Cat6 cable. The GHXm models support both 2.5 and 5 Gigabit connectivity, allowing high-speed wireless APs to run at full capacity, and building uplinks to be upgraded, without re-cabling.

sFlow

sFlow is an industry-standard technology for monitoring high-speed switched networks. It provides complete visibility into network use, enabling performance optimization, usage accounting/billing, and defense against security threats. Sampled packets sent to a collector (up to 5 collectors can be configured) ensure a real-time view of network traffic.

IPFIX (IP Flow Information Export)

IPFIX enables exporting IP flow data in a network for analysis. This provides network administrators with information for accounting, billing, capacity planning, and performance optimization.

VLAN Translation

Service Providers can use VLAN Translation to provide customer traffic with a unique VLAN-ID for use within the SP's network. It does this by mapping traffic arriving on a VLAN to a different VLAN on the outgoing paired interface.

This feature is also useful in Enterprise environments where it can be used to merge two networks together, without manually reconfiguring the VLAN numbering scheme.

VLAN Mirroring (RSPAN)

VLAN mirroring allows traffic from a port on a remote switch to be analyzed locally. Traffic being transmitted or received on the port is duplicated and sent across the network on a special VLAN.

Quality of Service

Enhanced Transmission Selection (ETS) provides quality of service by allocating bandwidth to important traffic classes, with the flexibility to share remaining bandwidth to maximize traffic throughput and performance.

Tri-authentication

Authentication options on the x530L Series also include alternatives to IEEE 802.1x port-based authentication, such as web authentication to enable guest access and MAC authentication for endpoints that do not have an IEEE 802.1x supplicant. All three authentication methods—IEEE 802.1x, MAC-based and Web-based—can be enabled simultaneously on the same port for tri-authentication.

TACACS+ Command Authorization

TACACS+ Command Authorization offers centralized control over which commands may be issued by each specific AlliedWare Plus device user. It complements authentication and accounting services for a complete AAA solution.

Premium Software License

By default, the x530L Series offers a comprehensive Layer 2 and basic Layer 3 feature set that includes static routing and IPv6 management features. The feature set can easily be elevated to full Layer 3 by applying the premium software license. This adds dynamic routing protocols and Layer 3 multicasting capabilities.

NETCONF/RESTCONF

NETCONF/RESTCONF with YANG data modeling provides a standardized way to represent data and securely configure devices.

VLAN Access Control List (ACLs)

ACLs simplify access and traffic control across entire segments of the network. They can be applied to a VLAN as well as a specific port.

Dynamic Host Configuration Protocol (DHCP) Snooping

DHCP servers allocate IP addresses to clients, and the switch keeps a record of addresses issued on each port. IP source guard checks against this DHCP snooping database to ensure only clients with specific IP and/or MAC address can access the network. DHCP snooping can be combined with other features, like dynamic ARP inspection, to increase security in Layer 2 switched environments, and also provides a traceable history, which meets the growing legal requirements placed on service providers.


Multicast Source Discovery Protocol (MSDP)

MSDP enables two or more PIM-SM (Sparse Mode) domains to share information on active multicast sources, for more efficient forwarding of multicast traffic.

Link Monitoring (Linkmon)

Linkmon health monitoring regularly sends probes over key links to gather metrics comprising latency, jitter, and probe loss. This supports pro-active management, and can be used with triggers to automate a change to network configuration in response to the declining health of a monitored link.

Distribution and Edge Connectivity

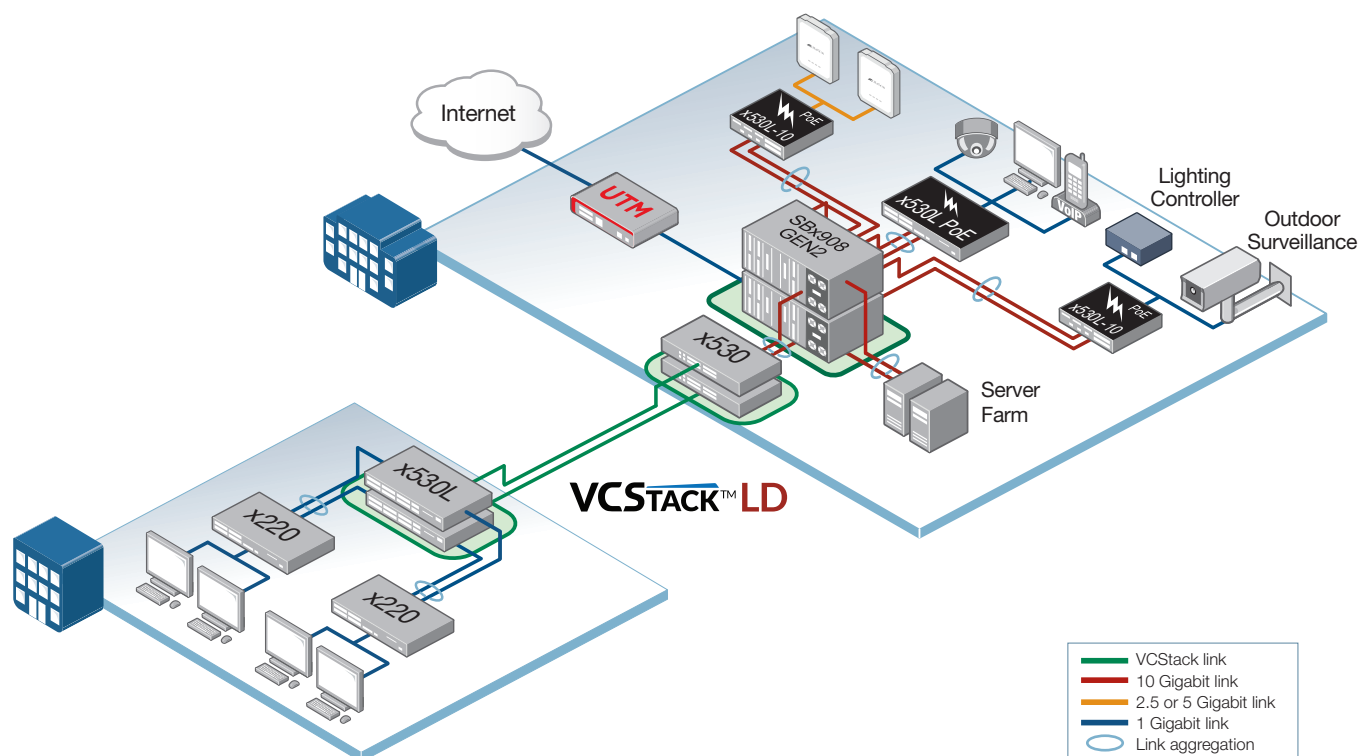

Resilient distributed switching

The x530L Series are ideal for distribution solutions, where resiliency and flexibility are required. In the above diagram, distribution switches utilize long-distance Virtual Chassis Stacking (VCStack LD) to create a single virtual unit out of multiple devices. By using fiber stacking connectivity, units can be kilometers apart—perfect for a distributed environment. Mixed stacking allows the x530L Series and x530 Series switches to be stacked together for even more deployment flexibility.

When combined with link aggregation, VCStack provides a solution with no single

point of failure, which fully utilizes all network bandwidth.

The x530L Series supports Enterprises and their use of business-critical online resources and applications, with a resilient and reliable distribution solution.

Power at the network edge

The 28 and 52 port PoE+ models can provide 30 Watts of power to endpoints such as wireless access points, security cameras, and IP phones – with dual internal PSUs providing a resilient solution.

The GHXm PoE++ models can provide up to 90 Watts per port, to connect and power

today's most advanced devices, such as outdoor PTZ security cameras with heaters and blowers, enhanced lighting management, and more. Multi-Gigabit enables 2.5 or 5 Gigabit connectivity over existing Cat5e/Cat6 cables, to maximize throughput, as well as support low-cost network performance upgrades.

Continuous PoE ensures power delivery to endpoints even during a switch firmware upgrade, while advanced security and access control features make the x530L Series the ideal choice for connecting and powering devices at the network edge.

SPECIFICATIONS

Performance

- 440Gbps of stacking bandwidth when using front panel 10G SFP+ ports
- 10KB L2 and 9KB L3 Jumbo frames
- Wirespeed multicasting
- 4094 configurable VLANs
- 16K MAC addresses
- 1,000 static IPv4 and IPv6 routes
- 256 dynamic IPv4 and IPv6 routes (with license)
- Up to 1250 OpenFlow v1.3 entries (with license)
- 1GB DDR3 SDRAM, 256MB NAND flash memory
- Packet buffer memory:
 - 1.5MB (28-port models)
 - 3MB (10, 18, 52-port models)

Reliability

- Modular AlliedWare Plus operating system
- Full environmental monitoring of PSUs, fans, temperature and internal voltages. SNMP traps alert network managers in case of any failure
- MTBF (Mean Time Between Failures)
 - x530L-10GHXm: 130,000 hours
 - x530L-18-GHXm: 110,000 hours
 - x530L-28GTX: 270,000 hours
 - x530L-28GPX: 200,000 hours
 - x530L-52GTX: 200,000 hours
 - x530L-52GPX: 140,000 hours

Expandability

- Stack up to eight¹ units in a VCSStack
- Versatile licensing options for additional features

Flexibility and Compatibility

- 10G SFP+ ports will support any combination of Allied Telesis 1000Mbps SFP and 10GbE SFP+ modules and direct attach cables listed in this document under Ordering Information
- Port speed and duplex configuration can be set manually or by auto-negotiation
- Front-panel SFP+ stacking ports can be configured as 1G/10G Ethernet ports

Diagnostic Tools

- Connectivity Fault Management (CFM) - Continuity Check Protocol (CCP) for use with G.8032 ERPS
- Built-In Self Test (BIST)
- Ping polling and TraceRoute for IPv4 and IPv6
- Optical Digital Diagnostic Monitoring (DDM)
- Find-me device locator
- Automatic link flap detection and port shutdown
- Cable fault locator (TDR)
- Uni-Directional Link Detection (UDLD)
- Active Fiber Monitoring detects tampering on optical links
- Port mirroring
- No limit on mirrored ports
- Up to 7 mirror (analyzer) ports
- VLAN mirroring (RSPAN)

IPv4 Features

- Equal Cost Multi Path (ECMP) routing
- Static unicast and multicast routing for IPv4
- UDP broadcast helper (IP helper)
- Directed broadcast forwarding
- Black hole routing
- DNS relay

- Policy-based routing
- Route redistribution (OSPF, RIP, and BGP)

IPv6 Features

- Device management over IPv6 networks with SNMP, Telnet and SSH
- IPv4 and IPv6 dual stack
- IPv6 over IPv4 tunneling (manual configuration only)
- Log to IPv6 hosts with Syslog
- NTP client and server
- DNS client and relay
- DHCPv6 server, relay, and client
- Static IPv6 unicast and multicast routing
- IPv6 aware storm protection and QoS
- IPv6 hardware ACLs
- IPv6 Ready certified

Management

- Industry-standard CLI with context-sensitive help
- Built-in text editor and powerful CLI scripting engine
- Comprehensive SNMP MIB support for standards-based device management
- Console management port on the front panel for ease of access
- Event-based triggers allow user-defined scripts to be executed upon selected system events
- NETCONF/RESTCONF northbound interface with YANG data modelling
- Eco-friendly mode allows ports and LEDs to be disabled to save power
- USB interface allows software release files, configurations and other files to be stored for backup and distribution to other devices
- Front panel 7-segment LED provides at-a-glance status and fault information
- Autonomous Management Framework Plus (AMF Plus) enables powerful centralized management and zero-touch device installation and recovery. Try AMF Plus for free with the built-in Starter license
- Web-based Graphical User Interface (GUI)

Quality of Service

- IP precedence and DiffServ marking based on Layer 2, 3 and 4 headers
- Queue scheduling options for strict priority, weighted round robin or mixed scheduling
- Taildrop for queue congestion control
- Extensive remarking capabilities
- Policy-based QoS based on VLAN, port, MAC and general packet classifiers
- Limit bandwidth per port or per traffic class down to 64kbps
- 8 priority queues with a hierarchy of high priority queues for real time traffic, and mixed scheduling, for each switch port
- Policy-based storm protection
- Wirespeed traffic classification with low latency essential for VoIP and real-time streaming media applications
- Enhanced Transmission Selection (ETS)

Resiliency Features

- EPSRing (Ethernet Protection Switched Rings) with SuperLoop Protection (SLP) and enhanced recovery
- EPSR Master or transit node deployment
- STP root guard
- Loop protection: thrash limiting and loop detection

- Dynamic link failover (host attach)
- Control Plane Prioritization (CPP) ensures the CPU always has sufficient bandwidth to process network control traffic
- PVST+ compatibility mode
- VCSStack fast failover minimizes network disruption
- SFP+ stacking ports can be configured as 10G Ethernet ports
- Long-Distance VCSStack using fiber modules (VCSStack LD)
- BPDU forwarding

Security Features

- MAC address filtering and MAC address lock-down
- Learn limits (intrusion detection) for single ports or LAGs
- Access Control Lists (ACLs) based on layer 3 and 4 headers
- Dynamic ACLs assigned via port authentication
- ACL Groups enable multiple hosts/ports to be included in a single ACL, reducing configuration
- Private VLANs provide security and port isolation for multiple customers using the same VLAN
- Secure Copy (SCP)
- DoS attack blocking and virus throttling
- BPDU protection
- Network Access and Control (NAC) features manage endpoint security
- Dynamic VLAN assignment
- Tri-authentication: MAC-based, web-based and IEEE 802.1x
- DHCP snooping, IP source guard and Dynamic ARP Inspection (DAI)
- Strong password security and encryption
- Auth fail and guest VLANs
- Secure File Transfer Protocol (SFTP) client
- Simple Certificate Enrollment Protocol (SCEP) supports secure management
- Authentication, Authorisation and Accounting (AAA)
- Bootloader can be password protected for device security
- Configurable ACLs for management traffic
- RADIUS group selection per VLAN or port

Software Defined Networking (SDN)

- OpenFlow v1.3 with support for encryption, connection interruption and inactivity probe

Environmental Specifications

- Operating temperature range: 0°C to 50°C (32°F to 122°F)
- Storage temperature range: -25°C to 70°C (-13°F to 158°F)
- Operating relative humidity range: 5% to 90% non-condensing
- Storage relative humidity range: 5% to 95% non-condensing
- Operating altitude: 3,048 meters maximum (10,000 ft)

Power Supply Specifications

- AC voltage: 90-264V (auto-ranging)
- Frequency: 50-60Hz

Electrical Approvals and Compliances

- EMC: EN55032 class A, FCC class A, VCCI class A, ICES-003 class A
- Immunity: EN55024, EN61000-3-levels 2 (Harmonics), and 3 (Flicker) – AC models only

Safety

- Standards: UL60950-1, CAN/CSA-C22.2 No. 60950-1-03, EN60950-1, EN60825-1, AS/NZS 60950.1

■ Certification: UL, cUL
- Restrictions on Hazardous Substances (RoHS) Compliance

■ EU RoHS compliant

■ China RoHS compliant

Product Specifications

	10/100/1000T (RJ-45) Copper Ports	100M/1/2.5/5 Gigabit Ports	1/10 Gigabit SFP+ Ports	Stacking Ports	PoE Enabled Ports	Switching Fabric	Forwarding Rate
x530L-10GHXm	-	8	2	2*	8	120Gbps	89.2Mpps
x530L-18GHXm	-	16	2	2*	16	200Gbps	148.8Mpps
x530L-28GTX	24	-	4	2*	-	128Gbps	95.2Mpps
x530L-28GPX	24	-	4	2*	24	128Gbps	95.2Mpps
x530L-52GTX	48	-	4	2*	-	176Gbps	130.9Mpps
x530L-52GPX	48	-	4	2*	48	176Gbps	130.9Mpps

*Stacking ports can be configured as additional 1G/10G Ethernet ports when the switch is not stacked

Physical Specifications

	Width	Depth	Height	Mounting	Unpacked Weight	Packaged Weight	Packaged Dimensions
x530L-10GHXm	210 mm (8.27 in)	362 mm (14.25 in)	42.5 mm (1.67 in)	Rack-mount	3.5 kg (7.72 lb)	4.8 kg (10.58 lbs)	461 x 371 x 153 mm (18.15 x 14.60 x 6.02 in)
x530L-18GHXm	441 mm (17.36 in)	256 mm (10.07 in)	44 mm (1.73 in)	Rack-mount	4.3 kg (9.48 lbs)	5.98 kg (13.18 lbs)	526 x412 x129 mm (20.70 x 16.22 x 5.07 in)
x530L-28GTX	441 mm (17.36 in)	323 mm (12.72 in)	44 mm (1.73 in)	Rack-mount	4.4 kg (9.07 lbs)	6.3 kg (13.89 lbs)	577 x 440 x 153 mm (22.72 x 17.32 x 6.02 in)
x530L-28GPX	441 mm (17.36 in)	421 mm (16.57 in)	44 mm (1.73 in)	Rack-mount	6.2 kg (13.67 lbs)	8.4 kg (18.52 lbs)	577 x 548 x 153 mm (22.72 x 21.57 x 6.02 in)
x530L-52GTX	441 mm (17.36 in)	323 mm (12.72 in)	44 mm (1.73 in)	Rack-mount	5.2 kg (11.46 lb)	7.1 kg (15.65 lbs)	577 x 440 x 128 mm (22.72 x 17.32 x 5.06 in)
x530L-52GPX	441 mm (17.36 in)	421 mm (16.57 in)	44 mm (1.73 in)	Rack-mount	6.7 kg (14.77 lbs)	8.9 kg (19.62 lbs)	577 x 548 x 153 mm (22.72 x 21.57 x 6.02 in)

Power Characteristics

	No PoE Load			Full PoE+ Load			Max PoE Power	PoE sourcing ports				
	Max Power Consumption	Max Heat Dissipation	Noise	Max Power Consumption	Max Heat Dissipation	Noise		PoE (7.5W)	PoE (15.4W)	PoE+ (30W)	PoE++ (60W)	PoE++ (90W)
x530L-10GHXm	60W	204 BTU/h	64 db	605W	2065 BTU/h	64 db	500W	8	8	8	8	5
x530L-18GHXm	86W	293 BTU/h	42 db	970W	3317 BTU/h	42 db	720W	16	16	16	12	8
x530L-28GTX	39W	133 BTU/h	42* db	-	-	-	-	-	-	-	-	-
x530L-28GPX	70W	239 BTU/h	42* db	890W	3037 BTU/h	42* db	740W	24	24	24	-	-
x530L-52GTX	60W	205 BTU/h	42* db	-W	-h	-	-	-	-	-	-	-
x530L-52GPX	95W	324 BTU/h	42* db	950W	3242 BTU/h	42* db	740W	48	48	24	-	-

* This figure is under 30 degree C ambient temperature

Noise: tested to ISO7779; front bystander position

Latency (microseconds)

	Port Speed				
	10Mbps	1Gbps	2.5Gbps	5Gbps	10Gbps
x530L-10GHXm	8.24µs	7.89µs	5.63µs	3.49µs	2.12µs
x530L-18GHXm	8.35µs	7.96µs	7.72µs	5.23µs	2.56µs
x530L-28GTX	6.06µs	3.98µs	-	-	1.63µs
x530L-28GPX	6.06µs	3.98µs	-	-	1.63µs
x530L-52GTX	8.34µs	5.27µs	-	-	1.67µs
x530L-52GPX	8.34µs	5.27µs	-	-	1.679µs

STANDARDS & PROTOCOLS

AlliedWare Plus Operating System

Version 5.5.6

Authentication

- RFC 1321 MD5 Message-Digest algorithm
- RFC 1828 IP authentication using keyed MD5

Border Gateway Protocol (BGP)

- BGP dynamic capability
- BGP outbound route filtering
- RFC 1772 Application of the Border Gateway Protocol (BGP) in the Internet
- RFC 1997 BGP communities attribute
- RFC 2385 Protection of BGP sessions via the TCP MD5 signature option
- RFC 2439 BGP route flap damping
- RFC 2545 Use of BGP-4 multiprotocol extensions for IPv6 inter-domain routing
- RFC 2858 Multiprotocol extensions for BGP-4
- RFC 2918 Route refresh capability for BGP-4
- RFC 3392 Capabilities advertisement with BGP-4
- RFC 3882 Configuring BGP to block Denial-of-Service (DoS) attacks
- RFC 4271 Border Gateway Protocol 4 (BGP-4)
- FC 4360 BGP extended communities
- RFC 4456 BGP route reflection - an alternative to full mesh iBGP
- RFC 4724 BGP graceful restart
- RFC 4893 BGP support for four-octet AS number space
- RFC 5065 Autonomous system confederations for BGP

Cryptographic Algorithms

FIPS Approved Algorithms

Encryption (Block Ciphers):

- AES (ECB, CBC, CFB and OFB Modes)
- 3DES (ECB, CBC, CFB and OFB Modes)

Block Cipher Modes:

- CCM
- CMAC
- GCM
- XTS

Digital Signatures & Asymmetric Key Generation:

- DSA
- ECDSA
- RSA

Secure Hashing:

- SHA-1
- SHA-2 (SHA-224, SHA-256, SHA-384, SHA-512)
- Message Authentication:
- HMAC (SHA-1, SHA-2(224, 256, 384, 512))
- Random Number Generation:
- DRBG (Hash, HMAC and Counter)

Non FIPS Approved Algorithms

- RNG (AES128/192/256)
- DES
- MD5

Encryption (management traffic only)

- FIPS 180-1 Secure Hash standard (SHA-1)
- FIPS 186 Digital signature standard (RSA)
- FIPS 46-3 Data Encryption Standard (DES and 3DES)

Ethernet Standards

- IEEE 802.2 Logical Link Control (LLC)
- IEEE 802.3 Ethernet
- IEEE 802.3ab1000BASE-T
- IEEE 802.3ae10 Gigabit Ethernet
- IEEE 802.3af Power over Ethernet (PoE)
- IEEE 802.3at Power over Ethernet up to 30W (PoE+)
- IEEE 802.3azEnergy Efficient Ethernet (EEE)
- IEEE 802.3bt Power over Ethernet up to 90W (PoE++)
- IEEE 802.3bz 2.5GBASE-T and 5GBASE-T ("multi-gigabit")
- IEEE 802.3u 100BASE-X
- IEEE 802.3x Flow control - full-duplex operation
- IEEE 802.3z 1000BASE-X

Ethernet Alliance

Gen2 PoE Class 8 Certified (GHXm models)



IPv4 Features

- RFC 768 User Datagram Protocol (UDP)
- RFC 791 Internet Protocol (IP)
- RFC 792 Internet Control Message Protocol (ICMP)
- RFC 793 Transmission Control Protocol (TCP)
- RFC 826 Address Resolution Protocol (ARP)
- RFC 894 Standard for the transmission of IP datagrams over Ethernet networks
- RFC 919 Broadcasting Internet datagrams
- RFC 922 Broadcasting Internet datagrams in the presence of subnets
- RFC 932 Subnetwork addressing scheme
- RFC 950 Internet standard subnetting procedure
- RFC 951 Bootstrap Protocol (BootP)
- RFC 1027 Proxy ARP
- RFC 1035 DNS client
- RFC 1042 Standard for the transmission of IP datagrams over IEEE 802 networks
- RFC 1071 Computing the Internet checksum
- RFC 1122 Internet host requirements
- RFC 1191 Path MTU discovery
- RFC 1256 ICMP router discovery messages
- RFC 1518 An architecture for IP address allocation with CIDR
- RFC 1519 Classless Inter-Domain Routing (CIDR)
- RFC 1542 Clarifications and extensions for BootP
- RFC 1591 Domain Name System (DNS)
- RFC 1812 Requirements for IPv4 routers
- RFC 1918 IP addressing
- RFC 2581 TCP congestion control

IPv6 Features

- RFC 1981 Path MTU discovery for IPv6
- RFC 2460 IPv6 specification
- RFC 2464 Transmission of IPv6 packets over Ethernet networks
- RFC 2711 IPv6 router alert option
- RFC 3484 Default address selection for IPv6
- RFC 3587 IPv6 global unicast address format
- RFC 3596 DNS extensions to support IPv6
- RFC 4007 IPv6 scoped address architecture
- RFC 4193 Unique local IPv6 unicast addresses
- RFC 4213 Transition mechanisms for IPv6 hosts and routers
- RFC 4291 IPv6 addressing architecture
- RFC 4443 Internet Control Message Protocol (ICMPv6)
- RFC 4861 Neighbor discovery for IPv6
- RFC 4862 IPv6 Stateless Address Auto-Configuration (SLAAC)
- RFC 5014 IPv6 socket API for source address selection
- RFC 5095 Deprecation of type 0 routing headers in IPv6
- RFC 5175 IPv6 Router Advertisement (RA) flags option
- RFC 6105 IPv6 Router Advertisement (RA) guard

Management

- AT Enterprise MIB including AMF Plus MIB and SNMP traps
- Optical DDM MIB
- SNMPv1, v2c and v3
- IEEE 802.1AB Link Layer Discovery Protocol (LLDP)
- RFC 1155 Structure and identification of management information for TCP/IP-based Internets
- RFC 1157 Simple Network Management Protocol (SNMP)
- RFC 1212 Concise MIB definitions
- RFC 1213 MIB for network management of TCP/IP-based Internets: MIB-II
- RFC 1215 Convention for defining traps for use with the SNMP
- RFC 1227 SNMP MUX protocol and MIB
- RFC 1239 Standard MIB
- RFC 1724 RIPv2 MIB extension
- RFC 2578 Structure of Management Information v2 (SMIv2)
- RFC 2579 Textual conventions for SMIv2
- RFC 2580 Conformance statements for SMIv2

- RFC 2674 Definitions of managed objects for bridges with traffic classes, multicast filtering and VLAN extensions
- RFC 2741 Agent extensibility (AgentX) protocol
- RFC 2787 Definitions of managed objects for VRRP
- RFC 2819 RMON MIB (groups 1,2,3 and 9)
- RFC 2863 Interfaces group MIB
- RFC 3176 sFlow: a method for monitoring traffic in switched and routed networks
- RFC 3411 An architecture for describing SNMP management frameworks
- RFC 3412 Message processing and dispatching for the SNMP
- RFC 3413 SNMP applications
- RFC 3414 User-based Security Model (USM) for SNMPv3
- RFC 3415 View-based Access Control Model (VACM) for SNMP
- RFC 3416 Version 2 of the protocol operations for the SNMP
- RFC 3417 Transport mappings for the SNMP
- RFC 3418 MIB for SNMP
- RFC 3621 Power over Ethernet (PoE) MIB
- RFC 3635 Definitions of managed objects for the Ethernet-like interface types
- RFC 3636 IEEE 802.3 MAU MIB
- RFC 4022 MIB for the Transmission Control Protocol (TCP)
- RFC 4113 MIB for the User Datagram Protocol (UDP)
- RFC 4188 Definitions of managed objects for bridges
- RFC 4292 IP forwarding table MIB
- RFC 4293 MIB for the Internet Protocol (IP)
- RFC 4318 Definitions of managed objects for bridges with RSTP
- RFC 4502 RMON 2
- RFC 4560 Definitions of managed objects for remote ping, traceroute and lookup operations
- RFC 5424 The Syslog protocol
- RFC 6527 Definitions of managed objects for VRRPv3
- RFC 7011 IPFIX: a method of exporting IP flow data in a network for analysis

Multicast Support

- Bootstrap Router (BSR) mechanism for PIM-SM
- IGMP query solicitation
- IGMP snooping (IGMPv1, v2 and v3)
- IGMP snooping fast-leave
- IGMP/MLD multicast forwarding (IGMP/MLD proxy)
- MLD snooping (MLDv1 and v2)
- PIM and PIM SSM for IPv6
- RFC 1112 Host extensions for IP multicasting (IGMPv1)
- RFC 2236 Internet Group Management Protocol v2 (IGMPv2)
- RFC 2710 Multicast Listener Discovery (MLD) for IPv6
- RFC 2715 Interoperability rules for multicast routing protocols
- RFC 3306 Unicast-prefix-based IPv6 multicast addresses
- RFC 3376 IGMPv3
- RFC 3618 Multicast Source Discovery Protocol (MSDP)
- RFC 3810 Multicast Listener Discovery v2 (MLDv2) for IPv6
- RFC 3956 Embedding the Rendezvous Point (RP) address in an IPv6 multicast address
- RFC 3973 PIM Dense Mode (DM)
- RFC 4541 IGMP and MLD snooping switches
- RFC 4601 Protocol Independent Multicast - Sparse Mode (PIM-SM): protocol specification (revised)
- RFC 4604 Using IGMPv3 and MLDv2 for source-specific multicast
- RFC 4607 Source-specific multicast for IP

Open Shortest Path First (OSPF)

- OSPF link-local signaling
- OSPF MD5 authentication
- Out-of-band LSDB resync
- RFC 1245 OSPF protocol analysis
- RFC 1246 Experience with the OSPF protocol
- RFC 1370 Applicability statement for OSPF
- RFC 1765 OSPF database overflow
- RFC 2328 OSPFv2
- RFC 2370 OSPF opaque LSA option

RFC 2740	OSPFv3 for IPv6	RFC 2082	RIP-2 MD5 authentication	RFC 8446	Transport Layer Security (TLS) v1.3
RFC 3101	OSPF Not-So-Stubby Area (NSSA) option	RFC 2453	RIPv2	RFC 8894	Simple Certificate Enrollment Protocol (SCEP)
RFC 3509	Alternative implementations of OSPF area border routers				
RFC 3623	Graceful OSPF restart				
RFC 3630	Traffic engineering extensions to OSPF				
RFC 4552	Authentication/confidentiality for OSPFv3				
RFC 5329	Traffic engineering extensions to OSPFv3				
RFC 5340	OSPFv3 for IPv6 (partial support)				

Quality of Service (QoS)

IEEE 802.1p Priority tagging

IEEE 802.1Qaz Enhanced Transmission Selection (ETS)

RFC 2211 Specification of the controlled-load network element service

RFC 2474 DiffServ precedence for eight queues/port

RFC 2475 DiffServ architecture

RFC 2597 DiffServ Assured Forwarding (AF)

RFC 2697 A single-rate three-color marker

RFC 2698 A two-rate three-color marker

RFC 3246 DiffServ Expedited Forwarding (EF)

Resiliency Features

ITU-T G.8032 / Y.1344 Ethernet Ring Protection Switching (ERPS)

IEEE 802.1ag CFM Continuity Check Protocol (CCP)

IEEE 802.1AX Link aggregation (static and LACP)

IEEE 802.1D MAC bridges

IEEE 802.1s Multiple Spanning Tree Protocol (MSTP)

IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)

IEEE 802.3adStatic and dynamic link aggregation

RFC 5798 Virtual Router Redundancy Protocol version 3 (VRRPv3) for IPv4 and IPv6

Routing Information Protocol (RIP)

RFC 1058 Routing Information Protocol (RIP)

RFC 2080 RIPvng for IPv6

RFC 2081 RIPvng protocol applicability statement

Security Features

SSH remote login

SSLv2 and SSLv3

TACACS+ Accounting, Authentication and Authorization (AAA)

IEEE 802.1X Authentication protocols (TLS, TTLS, PEAP and MD5)

IEEE 802.1X Multi-supplicant authentication

IEEE 802.1X Port-based network access control

RFC 2560 X.509 Online Certificate Status Protocol (OCSP)

RFC 2818 HTTP over TLS ("HTTPS")

RFC 2865 RADIUS authentication

RFC 2866 RADIUS accounting

RFC 2868 RADIUS attributes for tunnel protocol support

RFC 2986 PKCS #10: certification request syntax specification v1.7

RFC 3546 Transport Layer Security (TLS) extensions

RFC 3579 RADIUS support for Extensible Authentication Protocol (EAP)

RFC 3580 IEEE 802.1x RADIUS usage guidelines

RFC 3748 PPP Extensible Authentication Protocol (EAP)

RFC 4251 Secure Shell (SSHv2) protocol architecture

RFC 4252 Secure Shell (SSHv2) authentication protocol

RFC 4253 Secure Shell (SSHv2) transport layer protocol

RFC 4254 Secure Shell (SSHv2) connection protocol

RFC 5176 RADIUS CoA (Change of Authorization)

RFC 5280 X.509 certificate and Certificate Revocation List (CRL) profile

RFC 5425 Transport Layer Security (TLS) transport mapping for Syslog

RFC 5656 Elliptic curve algorithm integration for SSH

RFC 6125 Domain-based application service identity within PKI using X.509 certificates with TLS

RFC 6614 Transport Layer Security (TLS) encryption for RADIUS

RFC 6668 SHA-2 data integrity verification for SSH

Services

RFC 854 Telnet protocol specification

RFC 855 Telnet option specifications

RFC 857 Telnet echo option

RFC 858 Telnet suppress go ahead option

RFC 1091 Telnet terminal-type option

RFC 1350 Trivial File Transfer Protocol (TFTP)

RFC 1985 SMTP service extension

RFC 2049 MIME

RFC 2131 DHCPv4 (server, relay and client)

RFC 2132 DHCP options and BootP vendor extensions

RFC 2616 Hypertext Transfer Protocol - HTTP/1.1

RFC 2821 Simple Mail Transfer Protocol (SMTP)

RFC 2822 Internet message format

RFC 3046 DHCP relay agent information option (DHCP option 82)

RFC 3315 DHCPv6 (server, relay and client)

RFC 3633 IPv6 prefix options for DHCPv6

RFC 3646 DNS configuration options for DHCPv6

RFC 3993 Subscriber-ID suboption for DHCP relay agent option

RFC 4330 Simple Network Time Protocol (SNTP) version 4

RFC 5905 Network Time Protocol (NTP) version 4

VLAN Support

Generic VLAN Registration Protocol (GVRP)

IEEE 802.1adProvider bridges (VLAN stacking, Q-in-Q)

IEEE 802.1Q Virtual LAN (VLAN) bridges

IEEE 802.1v VLAN classification by protocol and port

IEEE 802.3acVLAN tagging

Voice over IP (VoIP)

LLDP-MED ANSI/TIA-1057

Voice VLAN

Feature Licenses

	Description	Includes	Stack Licensing
AT-FL-x530L-01	x530L Premium license	- RIPv1/v2 (256 routes)² - OSPFv2 (256 routes)² - BGP4 (256 routes)² - PIMv4-SM, DM and SSM v4 - VLAN double tagging (Q-in-Q) - RIPvng (256 routes)² - OSPFv3 (256 routes)² - MLDv1/v2 - PIM-SMv6/SSMv6 - RADIUS-Full - UDLD - VLAN Translation - PTP Transparent Mode	One license per stack member
AT-SW-APM10-1YR^{3,4}	Cumulative AMF Plus Master license	AMF Plus Master license for up to 10 nodes for 1 year	One license per stack
AT-SW-APM10-5YR^{3,4}	Cumulative AMF Plus Master license	AMF Plus Master license for up to 10 nodes for 5 years	One license per stack
AT-FL-x53L-8032	ITU-T G.8032 license	- G.8032 ring protection - Ethernet CFM	One license per stack member
AT-FL-x53L-CPOE	Continuous PoE license	Continuous PoE power for GHXm and GPX models	One license per stack member
AT-FL-x53L-MSTK	Mixed Stacking license	Stack x530L with x530 Series switches	One license per stack member
AT-FL-x530L-OF13-1YR	OpenFlow license	OpenFlow v1.3 for 1 year	Not supported on a stack
AT-FL-x530L-OF13-5YR	OpenFlow license	OpenFlow v1.3 for 5 years	Not supported on a stack

² Note that 1,000 IPv4 and 1,000 IPv6 static routes are included free in the base license

³ From AW+ version 5.5.2-2 onwards, AMF Plus licenses provide all standard AMF network management and automation features. They also enable the AMF Plus intent-based networking features in Vista Manager EX (from version 3.10.1 onwards)

⁴ Purchase one license per 10 nodes (up to 20 nodes maximum)

ORDERING INFORMATION

AT-x530L-10GHXm-xx⁵	8-port 100M/1/2.5/5G PoE++ stackable switch with 2 SFP+ ports and a single fixed power supply
AT-x530L-18GHXm-xx⁵	16-port 100M/1/2.5/5G PoE++ stackable switch with 2 SFP+ ports and a single fixed power supply
AT-x530L-28GTX-xx⁵	24-port 10/100/1000T stackable switch with 4 SFP+ ports and 2 fixed power supplies
AT-x530L-28GPX-xx⁵	24-port 10/100/1000T PoE+ stackable switch with 4 SFP+ ports and 2 fixed power supplies
AT-x530L-52GTX-xx⁵	48-port 10/100/1000T stackable switch with 4 SFP+ ports and 2 fixed power supplies
AT-x530L-52GPX-xx⁵	48-port 10/100/1000T PoE+ stackable switch with 4 SFP+ ports and 2 fixed power supplies
AT-RKMT-J15	Rack mount shelf kit for x530L-10GHXm
AT-BRKT-J24	Wall mount kit for x530L-10GHXm
AT-BRKT-J22	Wall-mount kit for x530L-28GTX & 52GTX
AT-VT-Kit3	Management Cable (USB to Serial Console)

⁵ Where xx = 10 for US power cord
20 for no power cord
30 for UK power cord
40 for AU power cord
50 for EU power cord

Accessories

10GbE SFP+ Modules Any 10G SFP+ module or cable can be used for stacking with the front panel 10G ports			
AT-SP10SR	10GSR 850 nm short-haul, 300 m with MMF	AT-SP10BD20-12	10 GbE Bi-Di (1270 nm Tx, 1330 nm Rx) fiber up to 20 km, TAA ⁶
AT-SP10SR/I	10GSR 850 nm short-haul, 300 m with MMF industrial temperature (only supported on 10GHXm and 18GHXm)	AT-SP10BD20-13	10 GbE Bi-Di (1330 nm Tx, 1270 nm Rx) fiber up to 20 km, TAA ⁶
AT-SP10LRa/I	10GLR 1310 nm medium-haul, 10 km with SMF industrial temperature	AT-SP10BD40/I-12	10 GbE Bi-Di (1270 nm Tx, 1330 nm Rx) fiber up to 40 km industrial temperature, TAA ⁶
AT-SP10ER40a/I	10GER 1310 nm long-haul, 40 km with SMF industrial temperature	AT-SP10BD40/I-13	10 GbE Bi-Di (1330 nm Tx, 1270 nm Rx) fiber up to 40 km industrial temperature, TAA ⁶
AT-SP10TM/I	1G/2.5G/5G/10G, 100 m copper, industrial temperature, TAA ⁶	10GbE SFP+ Cables	
AT-SP10BD10/I-12	10 GbE Bi-Di (1270 nm Tx, 1330 nm Rx) fiber up to 10 km industrial temperature, TAA ⁶	AT-SP10TW1	1 meter SFP+ direct attach cable
AT-SP10BD10/I-13	10 GbE Bi-Di (1330 nm Tx, 1270 nm Rx) fiber up to 10 km industrial temperature, TAA ⁶	AT-SP10TW3	3 meter SFP+ direct attach cable

⁶ Trade Act Agreement compliant (TAA)

1000Mbps SFP Modules	
AT-SPTXc	100 m, 10/100/1000T SFP, RJ-45
AT-SPTX/I	100 m, 10/100/1000T SFP, RJ-45, Industrial temperature
AT-SPSX	1000SX GbE multi-mode 850 nm fiber up to 550 m
AT-SPEX	1000X GbE multi-mode 1310 nm fiber up to 2 km
AT-SPSX/I	1000SX GbE multi-mode 850 nm fiber up to 550 m industrial temperature
AT-SPLX10a	1000LX GbE single-mode 1310 nm fiber up to 10 km
AT-SPLX10a/I	1000LX GbE single-mode 1310 nm fiber up to 10 km industrial temperature
AT-SPBD10-13	1000LX GbE Bi-Di (1310 nm Tx, 1490 nm Rx) fiber up to 10 km
AT-SPBD10-14	1000LX GbE Bi-Di (1490 nm Tx, 1310 nm Rx) fiber up to 10 km industrial temperature

AT-SPBD20-13/I	1000BX GbE Bi-Di (1310 nm Tx, 1490 nm Rx) fiber up to 20 km industrial temperature
AT-SPBD20-14/I	1000BX GbE Bi-Di (1490 nm Tx, 1310 nm Rx) fiber up to 20 km industrial temperature
AT-SPBD40-13/I	1000LX GbE single-mode Bi-Di (1310 nm Tx, 1490 nm Rx) fiber up to 40 km, industrial temperature
AT-SPBD40-14/I	1000LX GbE single-mode Bi-Di (1490 nm Tx, 1310 nm Rx) fiber up to 40 km, industrial temperature
AT-SPLX40	1000LX GbE single-mode 1310 nm fiber up to 40 km
AT-SPZX80	1000ZX GbE single-mode 1550 nm fiber up to 80 km
AT-SPZX120/I	1000ZX GbE single-mode 1550 nm fiber up to 120 km industrial temperature